

INSTALLATION

Handle the sensor housing gently while dismantling the sensor to avoid damaging internal parts.

Use a 1/16" Allen Wrench to removing the screws from the bottom of the sensor housing. Slightly open the bottom of the sensor housing and then slide up to disconnect from the top of the base plate.

Dismantle

Mounting


CONTINUED.....

3


PAIRING

Press the Learn Button on the sensor housing. If a message is sent, the Red LED will flash on the sensor. If the Bridge has received the message, its LED will briefly turn Green.

ENOCEAN, Temperature Humidity Combo Sensor

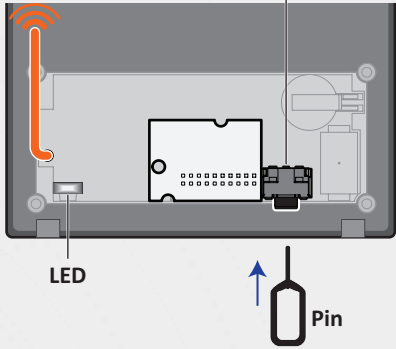

ENOCEAN, Temperature Humidity Combo Sensor

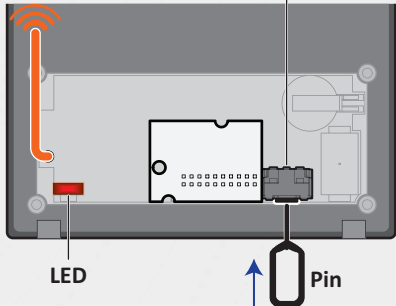


EnOcean Bridge



4

Install the Sensor housing on top of the base plate. Using a 1/16" Allen Wrench Install the screws in base of the housing.

Assembly

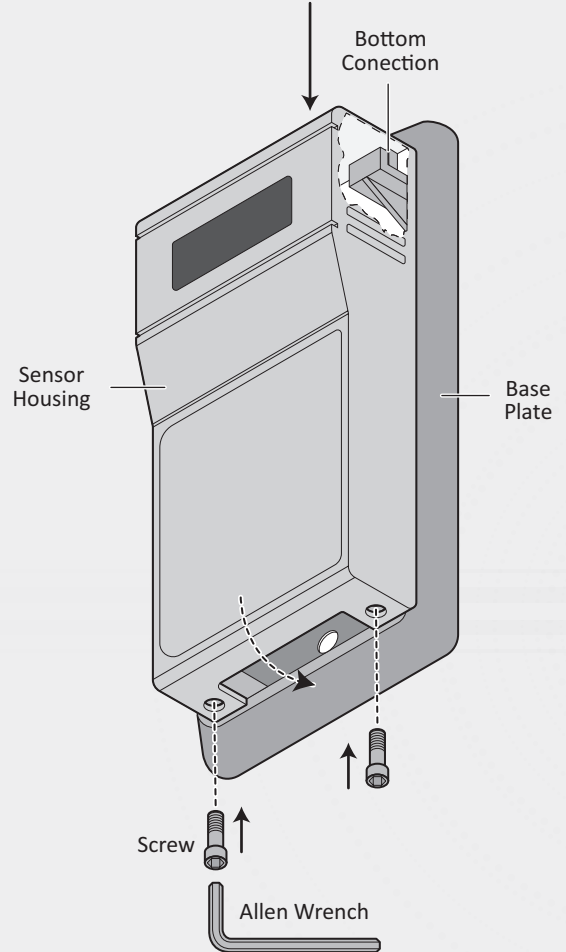

5

For further information, please refer to the *EnOcean Quick Start Guide* available in the autani website.