


**Model #:**  
**1000159 - 02**

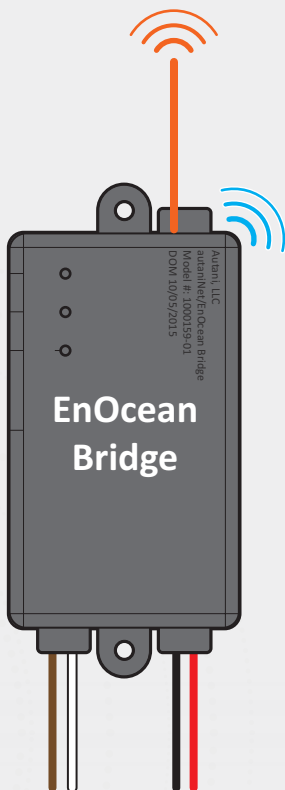


There are no user-serviceable parts inside the device. Unauthorized dismantling will void the warranty. For warranty information, see [www.autani.com/legal](http://www.autani.com/legal).

**WARNING:** Wireless devices should not be installed in metal enclosures. Take care to mount your installed wireless devices such that it can communicate with the system.

1

On the provided list of device serial numbers, add the location for the autaniNet/EnOcean Bridge.

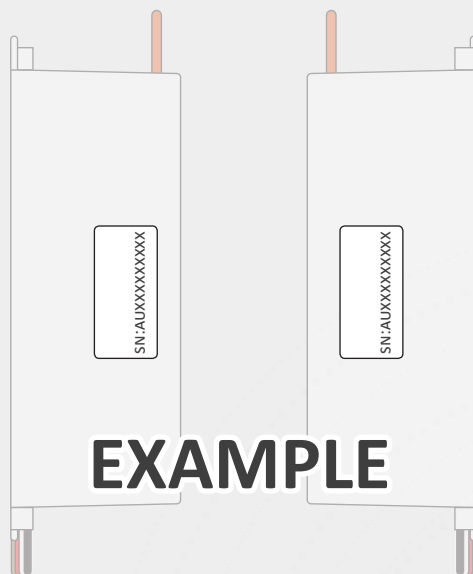

2

Wire the autaniNet/EnOcean Bridge.

Color	Signal
Red	12-24V AC/DC
Black	Common
Brown	Temperature Output (resistive)
White	Temperature Output (resistive)
Orange	Antenna Wire ( <i>DO NOT CUT</i> )

**NOTE:** This device can be powered from either an AC or DC power source. Current draw is less than 200mA at 12VDC.

3

For further information, please refer to the *EnOcean Quick Start Guide* available in the autani website.