



**WRC WITH LCS-624D
PHOTOCONTROL SENSOR
QUICK INSTALLATION SHEET**

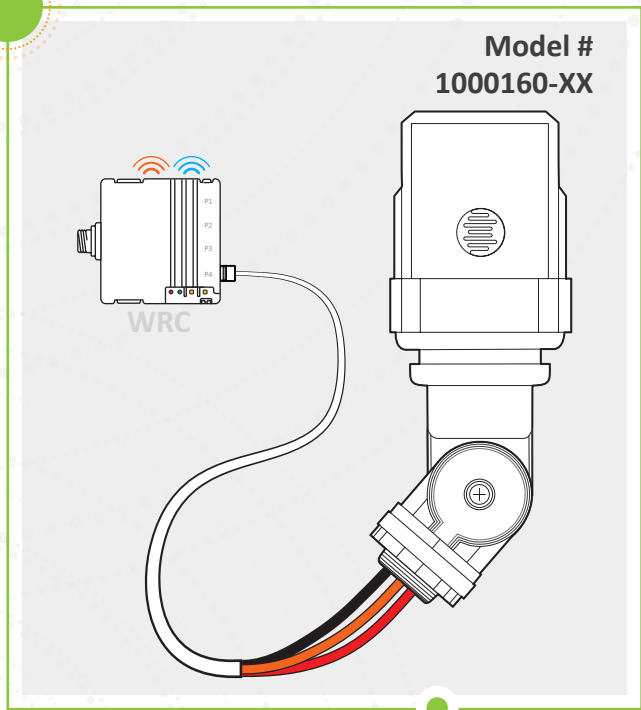

1

On the provided list of device serial numbers, document the location for each Sensor. Serial number for the sensor is available through WRC.

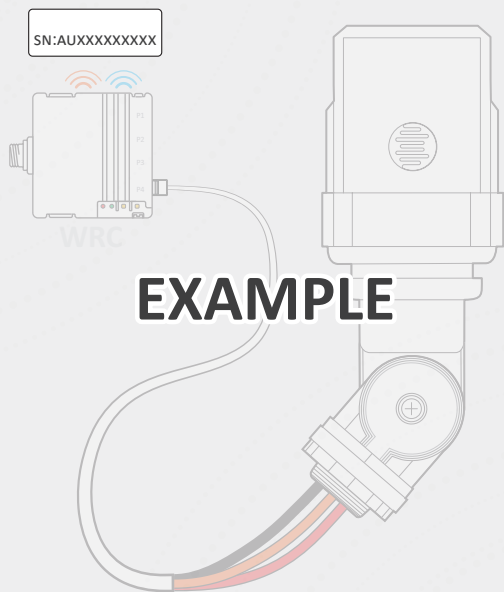

2

Determine mounting location for the LCS-624D Photocontrol Sensor. The Photocontrol Sensor can be mounted to any approved weatherproof outdoor rated box.

3

Screw stem into a 1/2"-14 threaded hole or 1/2" knockout (7/8" hole). Be sure to position the Photocontrol Sensor so that the light sensitive window is turned in the direction of the greatest amount of natural light and away from any nearby light fixtures.

4

Connect the LCS-624D Photocontrol Sensor as follows. See back page for additional details.

60623 Wire Color	Signal	LCS-624D Wire Color
White-Green	-	-
Green-White	-	-
White-Orange	-	-
Blue-White	Ground	Black
White-Blue	24V Signal	Orange
Orange-White	24V	Red

NOTE: The first color shown above is the primary color.

5

Connect the LCS-624D Photocontrol Sensor to the P4 port on the WRC

6

Use the slide adjustment clip to verify operation and leave clip at desired position.

ON/OFF Delay: ON-time is instantaneous; OFF-time is ~60 seconds

QUICK INSTALLATION SHEET

WRC WIRING DIAGRAM WITH PRECISION LCS-624D PHOTOCONTROL SENSOR

